



Portable Waterfed Systems

Portable Waterfed Systems

Trailer systems are extremely versatile and allow you to free up the load area in your van or even run your cleaning operation with a car. Options include simple de-ionising resin filter systems, or mini reverse osmosis filter systems for use in hard water areas, fitted and ready to go.

Streamline® Trailer Systems Pages 4 - 17

Trailer systems are extremely versatile, allowing you to free up the load area in the back of your van or car for additional equipment. We are able to provide you a bespoke trailer system, which includes pressure washing apparatus, solar panel cleaning kits, or simple bowser delivery units.

Streamflo™ Trolley Systems Pages 18 - 23

Trailer systems are extremely versatile, allowing you to free up the load area in the back of your van or car for additional equipment. We are able to provide you a bespoke trailer system, which includes pressure washing apparatus, solar panel cleaning kits, or simple bowser delivery units.

Softwash Systems Pages 24 - 29

The Softclean™ trolley system is designed to easily apply AlgoClear Pro Softclean chemical solution liberally and effectively. Stone cleaning, Render cleaning, Roof tile cleaning, Tarmac, Concrete, Timber cleaning, Glass and uPVC cleaning, Poly tunnel cleaning, and sport surfaces are just a few of the applications that the trolley system can be used for.



Trailer Systems

Streamline® offers a wide range of window cleaning systems, from the world's first flat tank system, the Smartank® to the traditional stainless steel caged Streamline® system. The full range of systems gives you the operator the right kit for your requirements.



1205

See Page: 80 - 83

2 Operators

650 KG Payload

400 Litre Tank

HEIGHT



1.30M

LENGTH



3.00M

WIDTH



1.6M



TAV1

See Page: 86 - 87

1-2 Operators

650 KG Payload

400 Litre Tank

HEIGHT



1.22M

LENGTH



1.85M

WIDTH



1.25M



TAV3

See Page: 88 - 89

1-2 Operators

1043 KG Payload

650 Litre Tank

HEIGHT



1.44M

LENGTH



2.55M

WIDTH



1.48M



TAV5

See Page: 90 - 91

1-2 Operators

1970 KG Payload

800 Litre Tank

HEIGHT



1.44M

LENGTH



3.15M

WIDTH



1.48M

1205 Trailer



Trailer systems are extremely versatile and allow you to free up the load area in your van or even run your cleaning operation with a car. Options include simple delivery units only, de-ionising resin filter systems, or the full 5-stage reverse osmosis boosted filter systems for use in hard water areas.


The small compact BrenderUp 1205 trailer system is an excellent trailer system for on-site. With 13" wheels for ease of towing, lockable ABS lid, gas struts, jockey wheel and tailgate as standard, this is a high-quality trailer specification. As the trailer is unbraked, and 750kg gross payload, there is no BE+1 license required in the UK.

Using the SMARTANK® flat tank systems, the baffled tank ensures the low centre of gravity maximises the stability during transportation. With the equipment cabinet mounted at the front


of the tank, at the door opening, operation has never been easier... and with pumps, controllers and filters easily accessible, via the opening of the cabinet, maintenance and filter changes are simply and quickly achieved.

Operators can adjust the flow rates of the pumps by a digital flow controller, or by a wireless remote controller. This allows the operator to choose powerful flow rates to suit the cleaning job, saving and conserving water when less intense water flow is needed.

These range of trailer systems are suitable for vehicles with towing capacity of 750kg. High capacity baffled tank integrated into lightweight chassis for easy towing. DOT road specification, single axle, integrated lights, and indicators. Supplied with European standard coupling and jockey wheel. Conforms to EU regulations.

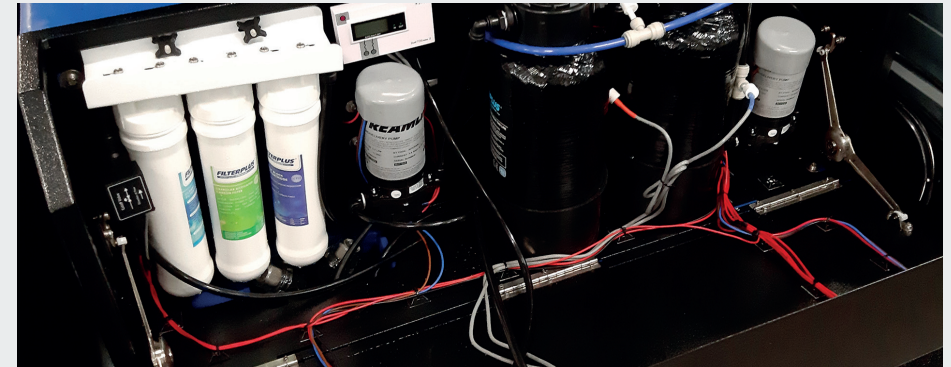

Bespoke systems are available to manufacture, including pressure washing apparatus, solar panel cleaning kits, or basic delivery units. Please contact STREAMLINE® for further information.

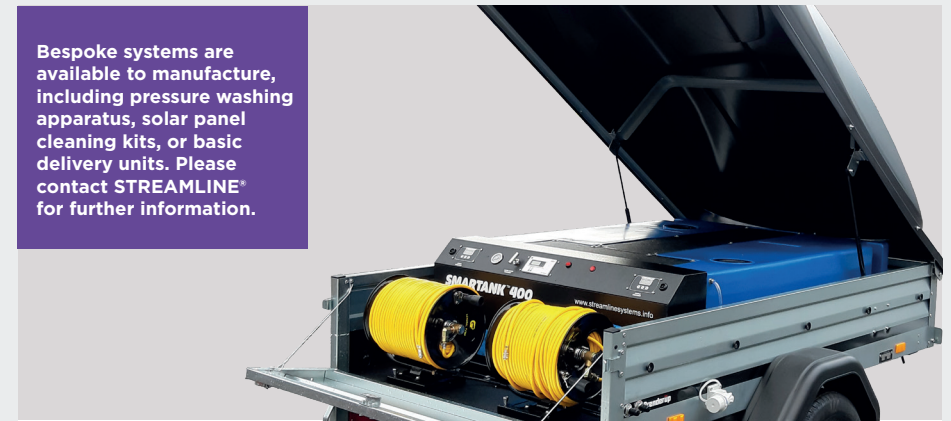

Specifications:

- **Water Tank** Pure water Polyethylene tank capacity of 400ltr
- **Operators** 1x or 2x operators via 2x hose reels and 2x 12v 100psi pumps
- **Pump** 6.9Bar, 100psi (12v) Shurflo™ Pumps - 3.8lpm (240lph) max speed
- **Controllers** Digital flow controllers to measure water flow, pressure, and battery voltage. Option to operate by wireless remote controllers if required.
- **Hose Reels** 2x fixed removable hose reels, with 100mtr 8mm STREAMLINE® hoses for optimum reach
- **Filtration** Full 5-stage purification system including pre-filtration (sediment, carbon, granular activated carbon), RO Membrane, and De-Ionising polishing resin. Dedicated 12v booster pump to provide efficient filtration output.
- **Battery** High capacity 12v 200amp gel battery, offers a full working day operation.
- **Charging** Integrated intelligent Numax battery charger, with external charging point, allowing charging onsite if required.



Scan Here
to shop online
for the latest prices

Visit our website
www.streamline.systems



Being modular in design, these tanks can be fixed into trailers utilising a metal flange, as opposed to traditional systems using whole metal frames.

With the equipment cabinet mounted at the front of the tank, at the door opening, operation has never been easier...and with pumps, controllers and filters easily accessible, via the opening of the cabinet, maintenance and filter changes are simply and quickly achieved.

Choose your specification:

- Reverse Osmosis filtration for economical water production
- External ports for ease of filling/supply whilst trailer remains locked
- Solenoid valve for auto shut-off to prevent tanks from over filling
- Removable hose reels with 100 metre Microbore Hose



Specifications:

2 Operators

650 KG
Payload

400 Litre
Tank

HEIGHT	LENGTH	WIDTH
1.30M	3.00M	1.60M
GROSS VEHICLE WEIGHT	UNLADEN WEIGHT	CARRYING CAPACITY
750KG	140KG	610KG

Bespoke systems are available to manufacture, including pressure washing apparatus, solar panel cleaning kits, or basic delivery units. Please contact STREAMLINE[®] for further information.

Features:

- Single axle, BrenderUp Aluminium composite sides for durability, longevity, strength & security
- All steel work galvanised or plated
- Phenolic 12mm resin coated ply floor
- Linex waterproof floor
- Protected rear light clusters
- ABS lid complete with gas struts
- 50mm pressed steel ball coupling (c/w secondary coupling)
Props stand on drawbar
- 175R13C Radial wheels & tyres



SYSTEM PART NO	OVERALL DIMENSIONS	PAYLOAD	TANK SIZE	DESCRIPTION	NO. OF PUMPS	NO. OF HOSE REELS
1205COMP6-2	305 x 160cm	610 kg	400 litre	SMARTANK [®] Delivery Bowser Unit	2	2
1205COMP6-DI-2	305 x 160cm	610 kg	400 litre	DI Filtration System	2	2
1205COMP6-RODI-2	305 x 160cm	610 kg	400 litre	SMARTANK [®] RODI Filtration System	2	2

Built in an Indespension trailer – clean line, robust construction and ease of use are the principal design features of the TAV. An aluminium based trailer makes them extremely light yet highly durable. The Indespension SuperRide suspension ensures smooth, stable towing even when the trailer is empty.

These range of trailer systems are suitable for vehicles with towing capacity of 1500kg. High capacity baffled tank integrated into lightweight chassis for easy towing. DOT road specification, single axle, integrated lights, and indicators with brake assist. Supplied with European standard coupling, jockey wheel, 2x rear trailer supports and manual parking brake. Conforms to EU regulations.

Operators can adjust the flow rates of the pumps by a digital flow controller, or by a wireless remote controller. This allows the operator to choose powerful flow rates to suit the cleaning job, saving and conserving water when less intense water flow is needed.



Water Tank

Pure water Polyethylene tank capacity of 400ltr, 650ltr and 1000ltr

Operators

2x operators via 2x hose reels and 2x 12v 100psi pumps 6.9Bar, 100psi (12v) Shurflo Pumps - 3.8lpm (240lph) max speed

Pump

6.9Bar, 100psi (12v) Shurflo™ Pumps - 3.8lpm (240lph) max speed

Controllers

Digital flow controllers to measure water flow, pressure, and battery voltage. Option to operate by wireless remote controllers if required.

Hose Reels

2x fixed A-Frame sturdy hose reels, with 100mtr 8mm STREAMLINE® hoses for optimum reach

Filtration

Full 5-stage purification system including pre-filtration (sediment, carbon, granular activated carbon), RO Membrane, and De-ionising polishing resin. Dedicated 12v booster pump to provide efficient filtration output.

Battery

High capacity 12v 200amp gel battery, offers a full working day operation.

Charging

Integrated intelligent Numax battery charger, with external charging point, allowing charging onsite if required

Aluminium Frame



Lightweight but strong composite construction to maximise the payload.

Trailer Supports



2x trailer support creates maximum load capacity when unhitched.

Secondary Floor



Secondary Floor installed on top of tank, to maximise usable trailer space. (Max load capacity 250kg)

Lockable doors



Complete with 2x keys, the trailer is kept locked and secure at all times.

Superide II Suspension



Fully independent axles to help create a smooth ride.

Towing Eye



Cast iron body delta style coupling, large boss taper roller bearing hubs and Indespension triple lock high security head.

TAV1 Trailer



Specifications:

Operators

1-2 Operators

650 KG Payload

400 Litre Tank

Internal Dimensions

DEPTH	LENGTH	WIDTH
1.25M	2.83M	1.73M

External Dimensions

HEIGHT	LENGTH	WIDTH
1.66M	2.8M	1.7M

Weights

CARRYING CAPACITY	GROSS VEHICLE WEIGHT	UNLADEN WEIGHT
510KG	750KG	240KG

Suitable for

SMATANK 400



Features:

- Single axle, Indespension ‘Super Ride’ unbraked suspension
- Aluminium composite sides for durability, longevity strength & security
- All steel work galvanised or plated
- Galvanised steel mudguards
- Phenolic 12mm resin coated ply floor
- Protected rear light clusters
- Rear double door loading facility
- Stainless rear door fittings
- Translucent fibre glass roof
- 50mm pressed steel ball coupling (c/w) secondary coupling
- Props stand on drawbar

SYSTEM PART NO	DESCRIPTION
TAV1-SMT-400-2	TAV1 Single Axle Trailer System 400Ltr Tank (No Filtration) 2 Operator
TAV1-SMT-400-RODI-2	TAV1 Single Axle Trailer System 400Ltr Tank (RODI Filtration) 2 Operator

TAV3 Trailer



Specifications:

Operators

1-2 Operators

1043 KG Payload

650 Litre Tank

Internal Dimensions

DEPTH



1.54M

LENGTH



2.59M

WIDTH



1.95M

External Dimensions

HEIGHT



1.97M

LENGTH



3.72M

WIDTH



1.93M

Weights

CARRYING
CAPACITY
1043KG

GROSS VEHICLE
WEIGHT
1500KG

UNLADEN
WEIGHT
457KG

Suitable for

SMARTANK 650



Features:

- Single axle, Indespension 'Super Ride' unbraked suspension
- Aluminium composite sides for durability, longevity strength & security
- All steel work galvanised or plated
- Galvanised steel mudguards
- Phenolic 12mm resin coated ply floor
- Protected rear light clusters
- Rear double door loading facility
- Stainless rear door fittings
- Translucent fibre glass roof
- 50mm pressed steel ball coupling (c/w secondary coupling)
- Triple lock anti - theft hitch
- Telescopic jockey wheel

SYSTEM PART NO	DESCRIPTION
TAV3-SMT-650-2	TAV3 Single Axle Trailer System 650Ltr Tank (No Filtration) 2 Operator
TAV3-SMT-650-RODI-2	TAV3 Single Axle Trailer System 650Ltr Tank (RODI Filtration) 2 Operator

TAV5 Trailer



Specifications:

Operators

1-2 Operators

1970 KG Payload

650 Litre Tank

Internal Dimensions



1.54M



3.20M



1.49M

External Dimensions



1.97M



4.32M



1.93M

Weights

CARRYING
CAPACITY
2600KG

GROSS VEHICLE
WEIGHT
1970KG

UNLADEN
WEIGHT
630KG

Suitable for

SMATANK 650 / BESPOKE HIGH
PRESSURE SYSTEMS



Features:

- Twin axle, Indespension 'SuperRide' braked suspension
- Aluminium composite sides for durability, longevity, strength & security
- All steel work galvanised or plated
- Galvanised steel mudguards
- A-Frame drawbar construction
- Phenolic 12mm resin coated ply floor
- Protected rear light clusters
- Rear double door loading facility
- Stainless steel door fittings
- Translucent fibreglass roof
- 50mm cast steel ball coupling (c/w secondary coupling)
- Prop Stands and clamps
- Triple Lock anti-theft hitch
- Telescopic jockey wheel
- Personnel Door

SYSTEM PART NO

TAV5

DESCRIPTION


Our TAV5 Indespension trailer can be tailored to suit your needs

STREAMFLO®

120 Litre Barrow

The 120ltr barrow is perfect for on-site cleaning of windows, gutters, fascias and cladding in and around institutions such as schools, colleges, shopping centres, business parks etc. The purpose built 120 litre low profile water tank is mounted on a two wheel trolley with large flat-free tyres offering excellent stability, even when full. Fitted with our **STREAMBOX™** powerpack which includes a 100 PSI pump, Lithium-Ion battery and controller making it a versatile addition to the range.

As standard the complete system includes a 5 metre feed hose with couplers to connect the pump to a pole, and a battery charger to charge the battery. The barrow can also be purchased without a **STREAMBOX™** fitted allowing it to be used in other applications such as mobile pressure washing, water delivery, etc.

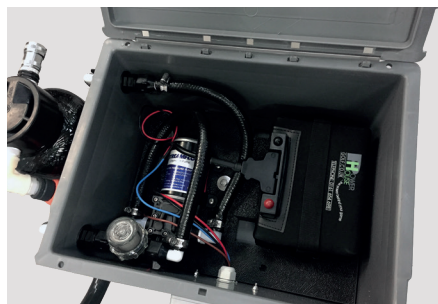

Scan Here
to shop online
for the latest prices

Contact us on
+44 (0)1626 830 830

STREAMFLO® 120 Litre

with Digital Controller, Lithium battery & charger

PART NO

SF-B120L-000

SF-B120L-000-H Includes 50mtr Hose & Reel



Dimensions

Height



74cm

Length



152cm

Width



68cm

Dry Weight



32kg

Applications include:

- Water Delivery
- Window Cleaning
- Plant Watering
- Plus many more.

Specifications:

- 100 PSI Pump
- Digital Flow Controller

STREAMFLO® 120 Litre with DI Filter

6x18 DI Filter, Digital Controller, Lithium Battery & Charger

PART NO

SF-B120L-072

SF-B120L-072-H Includes 50mtr Hose & Reel



Dimensions

Height



74cm

Length



152cm

Width



68cm

Dry Weight



32kg

Applications include:

- Water Delivery
- Window Cleaning
- Cladding & Fascia cleaning
- Plus many more.

Specifications:

- 100 PSI Pump
- Digital Flow Controller

STREAMFLO® 25 STREAMFLO® 50

The **STREAMFLO® 25** and **STREAMFLO® 50** Trolley Systems, mobile water delivery providing pure water on demand. Simply fill the container with tap water and it's ready to work, producing 0 ppm pure water on demand (version with resin filter only). Commercial trolley built for the most demanding tasks, ideal for: professional window cleaners, contract cleaners, shopping centres, hotels, schools, hospitals, nursing homes, public houses, clubs etc.

Resin capacity to filter up to 2,000 litres* of pure water. (*At a starting TDS of 100 ppm. in 25 litre and 50 litre)

Features

- 25 litre container (approx use – 25 litres of water per house).
- TDS hand-held meter for accurate water quality checks (DI version only).
- Powerful 100 PSI diaphragm pump.
- **STREAMLINE®** Flow Controller to maximise flow and save wasting water.
- Easily removable Lithium-ion battery with intelligent charger for efficient recharging (it is recommended that you charge battery frequently, however battery may last 2–3 days, depending on usage). 5 hour charge time / 12 hour continuous run time
- Compact design, with collapsible handle for storing in confined spaces.
- Lightweight frame with handle mounted on the front plate, for easy lifting and handling.
- Puncture proof tyers, for rough terrain.
- DI filtration for fast pure water production.
- Stainless outlet connector with stop valve to save water when disconnected.



Scan Here
to shop online
for the latest prices

STREAMFLO® 25

The **STREAMFLO® 25** Litre Trolley System is available in 2 x different options:

- **SF-TR25L-000:** No filtration vessel
- **SF-TR25L-072:** 18" DI Filtration, for standard tap water purification.

Specifications:

- Height: 115cm
- Width: 45cm
- Depth: 65cm
- Weight: 31kg (Dry)

PART NO	ITEM
SF-TR25L-000	STREAMFLO® 25 Litre Trolley with Lithium Ion battery & charger
SF-TR25L-072	STREAMFLO® 25 Litre Trolley with 6 x 18 DI filter, digital controller, Lithium Ion battery and charger
BC4L-TR-ES	Additional Lithium Ion Trolley Battery Charger
LB16AH-L	Lithium Ion Battery. Suit SF-TR25 & SF-TR50 Trolley Range c/w Charger

25 Litre System



25L

STREAMFLO® 50

The **STREAMFLO® 50** Litre Trolley System is available in 2 x different options:

- **SF-TR50L-000:** No filtration vessel
- **SF-TR50L-072:** 18" DI Filtration, for standard tap water purification.

Specifications:

- Height: 115cm
- Width: 50cm
- Depth: 65cm
- Weight: 45kg (Dry)

PART NO	ITEM
SF-TR50L-000	STREAMFLO® 50 Litre Trolley with Lithium Ion battery and charger
SF-TR50L-072	STREAMFLO® 50 Litre Trolley with 6 x 18 DI filter, digital controller, Lithium Ion battery and charger
BC4L-TR-ES	Additional Lithium Ion Trolley Battery Charger
LB16AH-L	Lithium Ion Battery. Suit SF-TR25 & SF-TR50 Trolley Range c/w Charger

50 Litre System



50L

STREAMFLO® MINI

New for
2022

The **STREAMFLO®** Mini is a compact water delivery unit that makes smaller window cleaning tasks a whole lot easier. Complete with a powerful pump and rechargeable battery, its 12-litre water tank is removable, allowing the stainless steel frame to fold down for easy transportation and storage.

The **STREAMFLO®** Mini can be coupled directly to a waterfed pole and is the perfect answer for window cleaning in areas where trailing hoses are not possible eg. courtyards, atriums, etc.

Extended

Height



908mm

Length



323mm

Width



243mm

Weight



6kg

Collapsed

Height



551mm

Length



141mm

Width



243mm



Features

- Durable and compact design
- Stainless steel folding frame
- 12-litre container
- Rechargeable battery
- Adjustable 4 speed controller
- Powerful 100Psi pump
- Wheels for outdoor use
- Extendable handle



Scan Here
to shop online
for the latest prices

PART NO

SF-TR12-000

ITEM

STREAMFLO® Mini 12Ltr Trolley System with Battery and Charger

STREAMLINE® Softclean

Roof and Render Cleaning Equipment

STREAMLINE® has joined forces with AlgoClear SoftClean to bring you packages for the treatment of roofs, walls and general amenity areas. STREAMLINE® SoftClean equipment is designed to easily apply AlgoClear Pro liberally and each kit includes a 36" lance for ground and low level applications and an angled adapter nozzle attachment to fit onto a STREAMLINE® waterfed pole for high level applications.



25ltr Battery powered Softwash Trolley

PART NO	ITEM
SW-T025L-222	25-ltr Battery powered Softwash Trolley with digital controller, lithium battery and charger

Height



115cm

Depth



65cm

Width



45cm

Weight / Dry



35kg

25L

Spare Softwash Trolley Accessories



Softclean 36" Lance with Angled Head & Fanjet

PART NO	ITEM
SW-SL050-0900	Softclean 36" Lance with Angled Head and Fanjet

36"



Softclean 6" Angled Adapter Nozzle with Fanjet

PART NO	ITEM
SW-HW050-06	Softclean 6" Angled Adapter Nozzle with Fanjet

6"

AlgoClear Pro is a high purity quaternary ammonium biocidal detergent designed to decontaminate biological growth on external hard surfaces. AlgoClear Pro is registered with the British Health & Safety Executive and the Irish Pesticide Control Service. It is water soluble and does not smell or leave smears. It breaks down in contact with biomass. The environmental footprint remains local, and limited in time. It is harmless to animals, unless ingested.



AlgoClear Solution

STREAMLINE® has joined forces with AlgoClear SoftClean to bring you packages for the treatment of roofs, walls and general amenity areas.

PART NO	ITEM
SW-ALGO-005	AlgoClear-Pro 5 Litre
SW-ALGO-010	AlgoClear-Pro 10 Litre

AlgoClear Pro can be used for:

- Stone cleaning
- Render cleaning
- Roof tile cleaning
- Tarmac, concrete, sports surfaces, etc.
- Timber cleaning
- Glass and uPVC cleaning
- Poly tunnel cleaning

It is fast acting, breaks contamination reproductive cycles and acts on 99.9% of microbial life leaving no durable environmental footprint. Applications to most surfaces simply requires a spray with no scrubbing or rinsing required. The procedure can be adapted to the type of contamination.

Average yield from 1 litre of AlgoClear Pro

Ground	Render	Timber	Glass & Plastics
200m ² Per Litre	40m ² Per Litre	60m ² Per Litre	300m ² Per Litre



14" (360mm) STREAMLINE® Brush - Medium Dual Bristle, with 2-nozzle Low Pressure Manifold

PART NO	ITEM
SW-SBF36-MD	Medium Dual Bristle, with 2-nozzle Low Pressure Manifold

New for
2022

120ltr Battery powered Softwash Trolley



120L



Weights & Dimensions



74cm



152cm



68cm



60kg

PART NO	ITEM
SW-B120-022-H	120-ltr Battery powered Softwash Barrow with Chemical Resistant Pump and Hose Reel nozzle

A softwash pole with a variety of extra features including the hidden hose angle adapter, ensuring that the hose stays inside of the pole even if a brush is attached. A single large fanjet nozzle comes as standard on this pole kit. The pole features front facing horizontal clamps and an easy to use shutoff valve at the bottom of the pole.

Key Features

- Carbon Fibre
- Shut off valve at the base of the pole
- Angle adapter



Softwash Pole Kit comes in 6 different sizes

Part No	No. Of Sections	Closed Length (mm/ft)	Extended Length (mm/ft)	Material
SW-PK007	5	1550	6.7m	Hybrid
SW-PK008	6	1550	7.9m	Hybrid
SW-PK009	7	1550	9.1m	100% Carbon
SW-PK010	8	1550	10.2m	100% Carbon
SW-PK011	9	1550	11.0m	100% Carbon
SW-PK012	10	1550	12.4m	100% Carbon

Softwash Pole accessories



Softwash 36" Lance with Angled Head & Fanjet

PART NO	ITEM
SW-VK001	Softwash Pole Valve Kit



Softwash Spray Nozzle Kit Includes 5 Spray Tips

PART NO	ITEM
SW-NK001	Softwash Spray Nozzle Kit

Don't forget,

for the latest prices shop online at
www.streamline.systems



Contact us on
+44 (0)1626 830 830

New for
2022

Injection Box

A portable carry box with a Dosatron chemical dosing unit. This product can mix Algo Clear (or similar) accurately with water at a pre set ratio on demand.

PLEASE NOTE - Not suitable for use with Sodium Hypochlorite

Features

- Portable & functional enclosure with carry handles
- Stainless quick release male hosesock-type fittings
- Pressure relief valve with adjustment and gauge
- Dosatron chemical dosing unit with adjustment for setting desired chemical ratio
- Designed to connect to mains water supply
- Can be used in conjunction with the Softwash Box if no mains water supply available
- No electricity required, powered by water pressure
- Supplied with chemical feed hose and filter
- Dosatron is fitted on removable board for easy maintenance

Dimensions

Height



400mm

Length



400mm

Width



335mm

Weight



5kg

PART NO.	ITEM
SW-DB070-01	Injection Box



Used to spray Algo Clear and other soft wash treatments onto roofs, walls, and K-Rend these portable portable boxes, allow you to clear algae, moss and lichen with maximum efficiency and minimum fuss and waste.

New for
2022

Soft Wash Box

A portable carry box with a lithium battery and chemical resistant pump. Simply connect the unit to a supply of water to feed the injection box or use pre-mixed chemical solution to apply directly to the surface needing treatment.

PLEASE NOTE - Not suitable for use with Sodium Hypochlorite

Features

- Portable & functional enclosure with carry handles
- Stainless quick release male hosesock-type fittings
- Chemical resistant pump and variable controller
- Designed to connect to mains water supply or to draw from a storage tank
- Can be used to pump pre-mixed chemical or to power the Injection Box with water
- Rechargeable lithium-ion battery with charger
- Controller and hose connections easily accessible

Dimensions

Height



246mm

Length



400mm

Width



300mm

Weight



9kg

PART NO.	ITEM
SW-SB070-16V	Softwash Box



Scan Here
to shop online
for the latest prices





If you are looking for an item
not featured in this product overview
then give us a call - we may be
able to source it for you.

Hamilton House, 8 Fairfax Road,
Heathfield Industrial Estate,
Newton Abbot, Devon TQ12 6UD, UK

T: +44 (0)1626 830 830
E: sales@streamline.systems
W: www.streamline.systems